


Overview

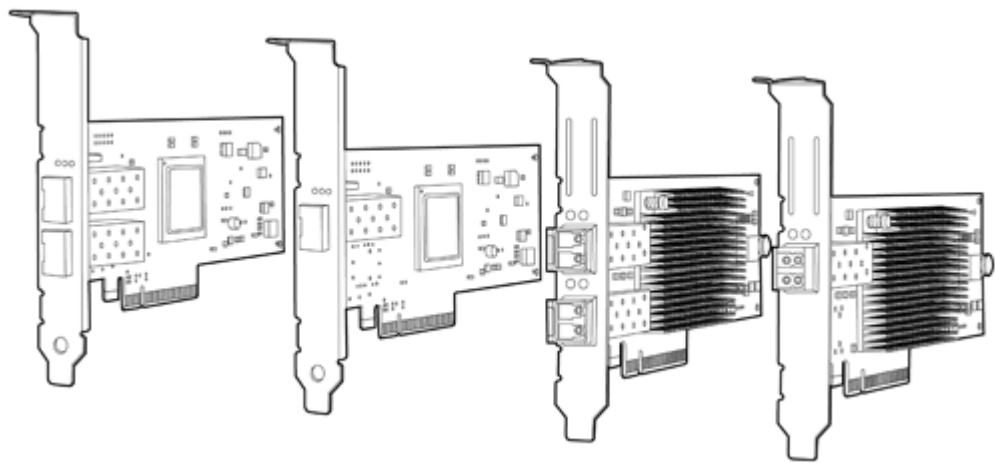

Models

|                                                            | Description                                                                                                                       | Part Number |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------|
| HP StorageWorks 81Q<br>PCIe FC HBA<br>Single Port (Qlogic) | StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux.<br>(Qlogic QLE2560)              | AK344A      |
| HP StorageWorks 82Q<br>PCIe FC HBA Dual Port<br>(Qlogic)   | StorageWorks 8Gb, Dual Channel PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux.<br>(Qlogic QLE2562) | AJ764A      |
| HP StorageWorks 81E<br>PCIe FC HBA Single Port<br>(Emulex) | StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux.<br>(Emulex LPe12000)             | AJ762A      |
| HP StorageWorks 82E<br>PCIe FC HBA Dual Port<br>(Emulex)   | StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux.<br>(Emulex LPe12002)             | AJ763A      |

### Overview

#### Product Description

The introduction of the HP StorageWorks 8Gb PCIe Fibre Channel Host Bus Adapters brings datacenter infrastructure components to a higher level of performance and efficiency. The HP StorageWorks 8Gb PCIe FC Host Bus Adapters are priced only slightly higher than equivalent 4 Gb HBAs, yet, they have the ability to deliver twice the I/O performance. In addition, an 8 Gb FC HBA purchased today will protect your investment longer than if you were to purchase an equivalent 4 Gb HBA. If you are using storage intensive applications, such as rich media, the increased performance of the 8 Gb infrastructure allows you to store and retrieve critical information faster.

The virtualization of servers has become an important capability for most datacenters. The ability to improve overall server utilization, resulting in significant cost savings, has made server virtualization a "must-have" for most enterprises. By having an HBA that supports and maximizes your server virtualization efforts, you are protecting your significant investments in virtualization technology.

Since most of today's datacenters are required to be available 24 X 7, it is critical that infrastructure components have failover capabilities. By installing redundant HBAs into your servers, you can feel confident that your servers will remain connected to mission-critical stored data.

Finally, today's enterprises are becoming more and more sensitive to the power consumption within the datacenter. The 8 Gb PCIe FC Host Bus Adapters provide a number of features that work together to reduce power consumption, thus delivering a "green" benefit within the server.

### Features and Benefits

#### Key Features - 81Q PCIe FC HBA (AK344A) and 82Q PCIe FC HBA (AJ764A)

##### First step into the 8 Gb future

- Better performance at a competitive price
- Well positioned for the future with 8 Gb technology
- Enhanced for storage intensive applications

##### Advanced embedded support for virtualized environments

- Supports virtualized servers for overall effective server utilization
- Allows multiple logical (virtual) connections to share the same physical port
- 256 queue pairs for intensive virtualization
- Prioritization of queues prevents conflicts between multiple queues

##### Redundant HBAs for high availability

- Failover of HBAs to prevent single point of failure
- Two single port cards are more reliable than one dual port card

##### Reduced power consumption

- Latest generation technology saves power
- Reduced number of components on each FC HBA reduces overall power consumption
- Lower power consumption means HBA requires lower airflow

#### Key Features - 81E PCIe FC HBA (AJ762A) and 82E PCIe FC HBA (AJ763A)

##### First step into the 8 Gb future

- Better performance at a competitive price
- Well positioned for the future with 8 Gb technology
- Enhanced for storage intensive applications

##### Advanced embedded support for virtualized environments

- Comprehensive virtualization capabilities with support for N-Port ID Virtualization (NPIV) and Virtual Fabric
- Virtualized server environments benefiting from industry-leading CPU offload
- Scaled up NPIV configurability (255 VPorts, larger RPI count - 4000)
- Support for large number of simultaneous transactions/exchanges (XRI count - 4000)
- Host to Fabric FC-SP authentication

##### Redundant HBAs for high availability

- Failover of HBAs to prevent single point of failure
- Two single port cards are more reliable than one dual port card

##### Enhanced Security and Performance

- Protection against corruption (BlockGuard/T10 dif) and unauthorized intrusion (FC-SP)
- Support for Message Signaled Interrupts extended (MSI-X), improves host utilization & enhances application performance
- Complete data and code parity protection
- Data parity and ECC protection
- Overlapping end-to-end data protection

### Features and Benefits

#### Benefits At a Glance

|                                                                                          |                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Get better performance at a competitive price</b>                                     | The 8 Gb series of fibre channel host bus adapters are priced only slightly higher than equivalent 4 Gb HBAs, yet they have the ability to deliver twice the I/O performance.                                                                                                                         |
| <b>Be well positioned for the future with 8 Gb technology</b>                            | Since 4 Gb technology will be considered "old" soon, customers have the opportunity to move to 8 Gb technology, which is backward compatible with 4 Gb and 2 Gb and will serve them for a much longer period than 4 Gb technology.                                                                    |
| <b>Enhanced for storage intensive applications</b>                                       | When using storage intensive applications like backup/restore, database transactions, and rich media, the improved I/O performance allows you to store and retrieve data much faster                                                                                                                  |
| <b>Supports virtualized servers for overall effective server utilization</b>             | Today, the average server operates at approximately 25% of its capacity and IT administrators are being challenged to increase server utilization and reduce operational costs. The 8Gb HBA support for virtualized servers will assist IT administrators in their adoption of server virtualization. |
| <b>Evolving HBA technology keeps pace with the effective bandwidth of server busses.</b> | . The new 8Gb Fibre Channel technology is a natural complement to the PCIe 2.0 bus architecture and will provide servers with ample bandwidth and throughput performance.                                                                                                                             |
| <b>Redundant HBAs for high availability</b>                                              | Failover of HBAs to prevent single point of failure. Two single port cards have higher data availability than one dual port card.                                                                                                                                                                     |
| <b>Latest generation technology saves power</b>                                          | Eliminating unnecessary internal activity results in reduced power consumption and waste.(Qlogic)                                                                                                                                                                                                     |

### Service and Support, HP Care Pack and Warranty Information

#### Warranty

3-0-0 Three-year parts exchange warranty. Additional Warranty protection can be purchased.

HP Global Services provides a three-year, limited warranty, fully supported by a worldwide network of resellers and service providers toll-free 7 x 24 hardware technical phone support for the duration of the warranty. In addition, available service offerings include a full range of HP Care Pack packaged hardware and software services.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

---

**Software Product Services** Stand-alone telephone support  
Rights to new license version  
Media and documentation updates

---

**Hardware Product Services** Installation services  
On-site maintenance (includes warranty support)  
Response time upgrades during the warranty period  
Post-warranty coverage  
RAID setup and performance consulting via statement of work  
For additional hardware installation and maintenance information, please refer to the URL listed below:  
<http://www.hp.com/hps/hardware/>.

---

**Warranty Upgrade Options** Response - Upgrade on-site response from next business day to same day 4 hours  
Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours  
Duration - Select duration of coverage for a period of 1, 3, or 5 years  
Additional Warranty protection and/or HP Installation packages can be purchased.

---

**HP Care Pack Information** Sample part numbers:

|                                             |             |
|---------------------------------------------|-------------|
| 3 years, uplift to 5 x 9, Next Day Response | FM-**XHW-36 |
| 3 years, uplift to 5 x 9, 4-hour Response   | FM-**4HR-36 |
| 3 years, uplift to 7 x 24, 4-hour Response  | FM-**724-36 |
| Hardware Installation                       | FM-**INS-IN |

\*\* Represents a two-digit, product-specific code

HP Care Pack is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.

HP Care Pack is not available for less than the product's warranty duration.

HP Care Pack is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the Warranty Start Date (delivery date to end user customer).

Proof of purchase may be required.

HP Care Pack services are prepaid.

If ordering this HBA for a non-HP server, manually add package band 8D4 and Installation HA113A1 band 527. If ordering this HBA as an add-on to an existing HP server, manually add Installation HA113A1 band 527.

## *Service and Support, HP Care Pack and Warranty Information*

For additional HP Care Pack (hardware & software) information, as well as orderable part numbers, please refer to the URL: <http://www.hp.com/hps/carepack/>

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

### Technical Specifications

|                                               | 81E PCIe                                                                                                                                                                                                                             | 82E PCIe<br>Dual Port                                                                                                                                                                                                               | 81Q PCIe                                                                                                                                                                                                                            | 82Q PCIe<br>Dual Port                                                                                                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of channels                            | Single                                                                                                                                                                                                                               | Dual                                                                                                                                                                                                                                | Single                                                                                                                                                                                                                              | Dual                                                                                                                                                                                                                                 |
| Port Speed                                    | 8 Gb                                                                                                                                                                                                                                 | 8 Gb                                                                                                                                                                                                                                | 8 Gb                                                                                                                                                                                                                                | 8 Gb                                                                                                                                                                                                                                 |
| Slot type supported                           | PCI Express 2.0 to Fibre Channel                                                                                                                                                                                                     | PCI Express 2.0 to Fibre Channel                                                                                                                                                                                                    | PCI Express 2.0 to Fibre Channel                                                                                                                                                                                                    | PCI Express 2.0 to Fibre Channel                                                                                                                                                                                                     |
| OS Supported                                  | Microsoft Windows Server 2003 (x86 and 64-bit Extended)<br>Microsoft Windows Server 2008<br>Linux<br>Red Hat Enterprise Linux 4.5/4.6 & 5.1 / 5.2 (x86, AMD64, EM64T)<br>SUSE Linux Enterprise Server 9 & 10 SP1 (x86, AMD64, EM64T) | Microsoft Windows Server 2003 (x86 and 64-bit Extended)<br>Microsoft Windows Server 2008<br>Linux<br>Red Hat Enterprise Linux 4.5/4.6 & 5.1/ 5.2 (x86, AMD64, EM64T)<br>SUSE Linux Enterprise Server 9 & 10 SP1 (x86, AMD64, EM64T) | Microsoft Windows Server 2003 (x86 and 64-bit Extended)<br>Microsoft Windows Server 2008<br>Linux<br>Red Hat Enterprise Linux 4.5/4.6 & 5.1/ 5.2 (x86, AMD64, EM64T)<br>SUSE Linux Enterprise Server 9 & 10 SP1 (x86, AMD64, EM64T) | Microsoft Windows Server 2003 (x86 and 64-bit Extended)<br>Microsoft Windows Server 2008<br>Linux<br>Red Hat Enterprise Linux 4.5/4.6 & 5.1 / 5.2 (x86, AMD64, EM64T)<br>SUSE Linux Enterprise Server 9 & 10 SP1 (x86, AMD64, EM64T) |
| Servers Supported                             | HP ProLiant                                                                                                                                                                                                                          | HP ProLiant                                                                                                                                                                                                                         | HP ProLiant                                                                                                                                                                                                                         | HP ProLiant                                                                                                                                                                                                                          |
| Array Platforms Supported                     | EVA4x00,<br>EVA4400<br>EVA6x00,<br>EVA8x00,<br>MSA1000<br>MSA1500<br>MSA2000<br>XP128/1024<br>XP10000/12000<br>XP20000/24000                                                                                                         | EVA4x00,<br>EVA4400<br>EVA6x00,<br>EVA8x00,<br>MSA1000<br>MSA1500<br>MSA2000<br>XP128/1024<br>XP10000/12000<br>XP20000/24000                                                                                                        | EVA4x00,<br>EVA4400<br>EVA6x00,<br>EVA8x00,<br>MSA1000<br>MSA1500<br>MSA2000<br>XP128/1024<br>XP10000/12000<br>XP20000/24000                                                                                                        | EVA4x00,<br>EVA4400<br>EVA6x00,<br>EVA8x00,<br>MSA1000<br>MSA1500<br>MSA2000<br>XP128/1024<br>XP10000/12000<br>XP20000/24000                                                                                                         |
| What's Included in the Box?                   | 8 Gb HBA with standard bracket, one 8 Gb SFP, low-profile bracket, Quick-Install Guide                                                                                                                                               | 8 Gb HBA with standard bracket, one 8 Gb SFP, low-profile bracket, Quick-Install Guide                                                                                                                                              | 8 Gb HBA with standard bracket, one 8 Gb SFP, low-profile bracket, Quick-Install Guide                                                                                                                                              | 8 Gb HBA with standard bracket, one 8 Gb SFP, low-profile bracket, Quick-Install Guide                                                                                                                                               |
| Environmental - Operating Temperature         | 32° to 131° F (0° to 55° C)                                                                                                                                                                                                          | 32° to 131° F (0° to 55° C)                                                                                                                                                                                                         | 32° to 131° F (0° to 55° C)                                                                                                                                                                                                         | 32° to 131° F (0° to 55° C)                                                                                                                                                                                                          |
| Environmental - Storage Temperature           | -20° to 158° F (-40° to 70° C)                                                                                                                                                                                                       | -20° to 158° F (-40° to 70° C)                                                                                                                                                                                                      | -20° to 158° F (-40° to 70° C)                                                                                                                                                                                                      | -20° to 158° F (-40° to 70° C)                                                                                                                                                                                                       |
| Environmental - Relative Humidity - Operating | 5% to 95% non-condensing                                                                                                                                                                                                             | 5% to 95% non-condensing                                                                                                                                                                                                            | 10% to 90% non-condensing                                                                                                                                                                                                           | 10% to 90% non-condensing                                                                                                                                                                                                            |
| Product Dimensions (HxW)                      | 6.60 x 2.71 in (167.64mm x 2.71 mm)                                                                                                                                                                                                  | 6.60 x 2.71 in (167.64mm x 2.71 mm)                                                                                                                                                                                                 | 6.60 x 2.54 in (167.64 mm x 64.4 mm)                                                                                                                                                                                                | 6.60 x 2.54 in (167.64 mm x 64.4 mm)                                                                                                                                                                                                 |
| Media                                         | Multi-mode Optic (SFP+)                                                                                                                                                                                                              | Multi-mode Optic (SFP+)                                                                                                                                                                                                             | Multi-mode Optic (SFP+)                                                                                                                                                                                                             | Multi-mode Optic (SFP+)                                                                                                                                                                                                              |
| Connector                                     | Short wave laser with LC type connector                                                                                                                                                                                              | Short wave laser with LC type connector                                                                                                                                                                                             | Short wave laser with LC type connector                                                                                                                                                                                             | Short wave laser with LC type connector                                                                                                                                                                                              |
| PCIe Connector                                | PCIe x8<br>Max x4 lanes Gen2<br>Max x8 lanes Gen1                                                                                                                                                                                    | PCIe x8<br>Max x4 lanes Gen2<br>Max x8 lanes Gen1                                                                                                                                                                                   | PCIe x8<br>Max x4 lanes Gen2<br>Max x8 lanes Gen1                                                                                                                                                                                   | PCIe x8<br>Max x4 lanes Gen2<br>Max x8 lanes Gen1                                                                                                                                                                                    |
| Auto-negotiation                              | 8 Gb/4 Gb/2 Gb                                                                                                                                                                                                                       | 8 Gb/4 Gb/2 Gb                                                                                                                                                                                                                      | 8 Gb/4 Gb/2 Gb                                                                                                                                                                                                                      | 8 Gb/4 Gb/2 Gb                                                                                                                                                                                                                       |

Technical Specifications

|          |                                                     |                                                     |                                                     |                                                     |
|----------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Brackets | Shipped with both ½ height and full-height brackets | Shipped with both ½ height and full-height brackets | Shipped with both ½ height and full-height brackets | Shipped with both ½ height and full-height brackets |
|----------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.